

Product specification

Classic^{AL}

1. Scope

- Single outward opening aluminium door
- Double outward opening aluminium door*
- Single inward opening aluminium door
- Double inward opening aluminium door*
- Single double-swing aluminium door*
- Double double-swing door aluminium door*
- Standalone aluminium panel*

2. Sizing

All sizes shown are structural sizes in mm


Variant	Min Width	Max Width	Min Height	Max. Height
Single Door	900	1200	900	2200
Single door with side panel	1200	2400	1200	2200
Single Door with over panel	1500	1200	1200	3400

Note: Side and/or over panels can be used in a modular fashion to secure larger openings.

3. Accreditation & Warranty

- Secured by Design 'Police Preferred Specification'
- LPCB certified to LPS 2081 Security Rating B
- 10 year anti-rust warranty
- 1 year manufacturer's warranty

4. Configuration

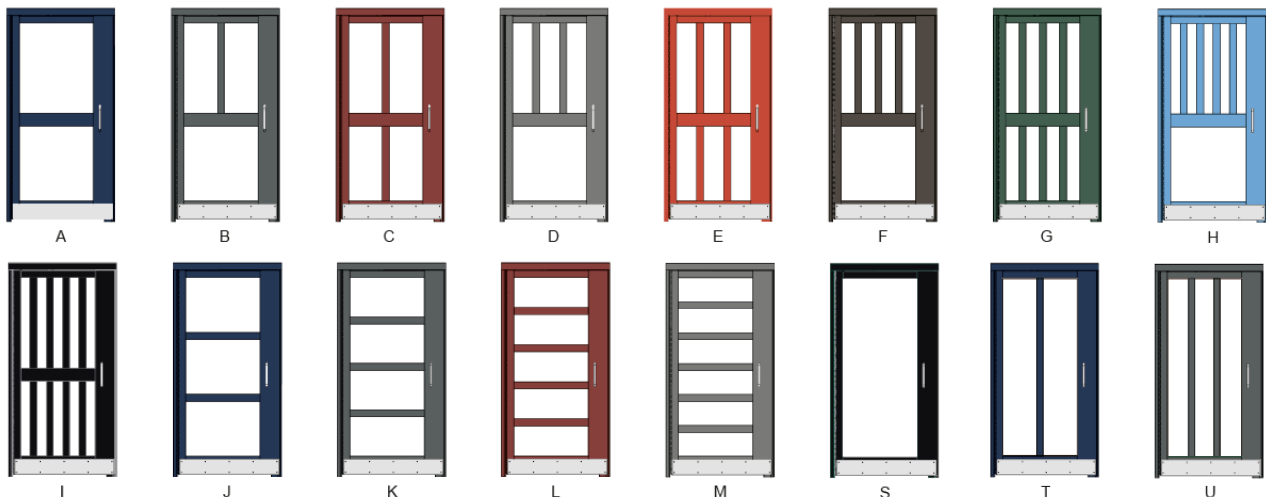

Note: Design configurations are shown with glazed infills, but these can be replaced or used in conjunction with solid infills.



Product specification

Classic^{AL}

5. Glazing

- Polycarbonate - 6.8mm or 9.5mm
- Laminate - 6.8mm or 9.5mm
- Etched or diffuser glass laminate - 6.8mm
- Double glazed unit - 24mm
- Stainless steel solid infill - 10mm or 24mm

6. Hinge

- Pivot hinge

7. Locking

- IGEM 5000F magnetic locks
- Sashlock*
- Deadlock*
- Night latch*
- Electric strike*
- Euro Profile cylinder*
- Thumbturn*

8. Ancillary Items

- Door closer
- Limit stay
- Aluminium threshold
- Lever handle*
- Straight or cranked pull handle*
- Push plate
- Kick plate
- Pull Handle
- Brush Strip
- Painted trim*
- Additional keys or suited*
- Doorstops*
- Wall or floor mounted rubber buffer*
- Bolt-in hand rail*
- Concrete-in hand rail*
- Bollard*

9. Finish

Polyester powder coated in a choice of 9 colours with a textured finish, as standard. Other colours and finishes are available on request.

