

ClassicAL

BESPOKE ALUMINIUM COMMUNAL ENTRANCE DOORS

At Bradbury Group, our aluminium communal entrance doors offer collaborative innovation and enduring quality.

Developed in partnership with police, architects, and clients, our doors are crafted to meet the high-traffic demands of communal spaces while excelling in both aesthetics and security.



Why Choose Aluminium Communal Entrance Doors?

Aluminium doors offer a perfect blend of strength, style, and sustainability. They serve as a secure barrier while enhancing the visual appeal of any building. These doors are ideal for both residential and commercial applications, providing excellent insulation and requiring minimal maintenance.

Our **ClassicAL** collection represents the pinnacle of door solutions. Crafted from reinforced aluminium and stainless steel, these doors offer:

- **Enhanced durability and weather resistance**
- **Flexible configurations**
(single, leaf and a half and double door options)
- **Excellent thermal insulation properties**

When time matters... ...we've got you covered

Access faster quotations and improved lead-times to respond to opportunities quickly and confidently.

Visit: brad.bradbury-group.com

- **Quote faster**
- **Respond sooner**
- **View lead-times**
- **Win more projects**

Use the Brad Configurator with confidence, it will instantly flag any non-certified selections as you build your specification.



ClassicAL


Door Sizing	Certified Single	Uncertified Single	Leaf & Half	Double
Min Width	900	715	1350	1350
Min Height	900	900	1500	1500
Max Width	1200	1500	2300	2300
Max Height	2200	2700	2700	2700

Side Panels	Certified On Door	Uncertified On Door
Min Width	300	200
Min Height	900	900
Max Width	1200	1650
Max Height	2200	2700

Over Panels	Certified On Door	Uncertified On Door
Min Width	900	715
Min Height	300	200
Max Width	2200	2800
Max Height	1200	1650

Door Configuration Options

Design configurations are shown with glazed infills but can be replaced or used in conjunction with solid infills.

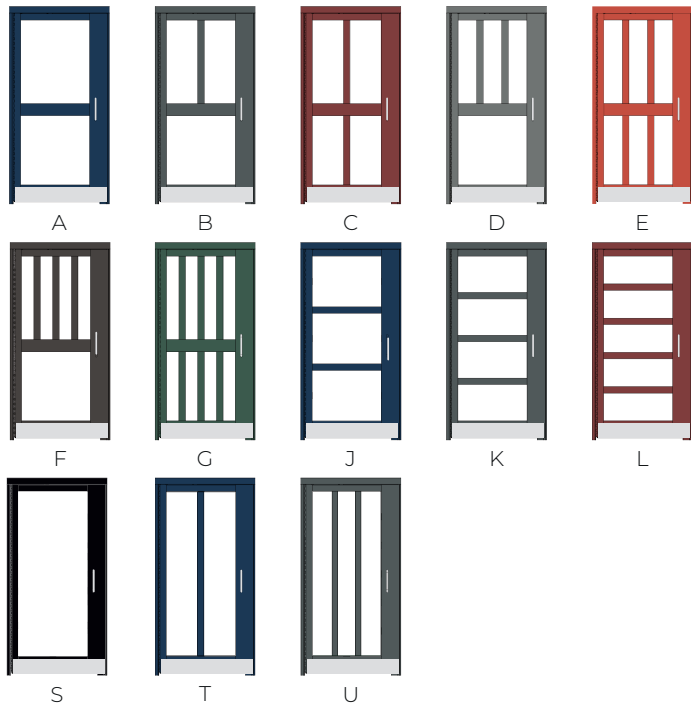

Frames	Single Rebate	Double Rebate
Min Width	100	100
Max Width	100	100

Opening Directions	Thresholds
Outward & Inward	Low profile 13mm Double Ramp

Visions (Glass Type)
6.8mm Laminate
9.5mm Laminate
6.8mm Polycarbonate
9.5mm Polycarbonate
21mm DGU
10mm HammerGlass

*All dimensions shown in mm.

Certification

Certification is limited to selected door compositions, configurations, hardware, glazing and locking options.

The combination of both side and top panels can affect the maximum allowable certified sizing.

Contact your sales representative for full certification details.



Looking for a fast quotation: brad.bradbury-group.com

Bradbury Group

6 Atkinsons Way, Scunthorpe, DN15 8QJ

sales@bradbury-group.com

+44(0)1724 271999

Follow us [in](#) [f](#) [v](#) [i](#)